

IMPORTANT NOTES:

INTERMEDIATE GUARD RAIL.

THE INFORMATION GIVEN ON THIS CHIMNEY INSTALLATION ADVICE SHEET IS CRUCIAL TO THE SUCCESSFUL COMPLETION OF THE QUOTED WORK.

IF SCAFFOLD ACCESS IS BEING PROVIDED BY OTHERS IT MUST BE ERECTED BY COMPETENT SCAFFOLDERS, AND IDEALLY BE CERTIFICATED. IT MUST SATISFY THE FOLLOWING BASIC SAFETY AND SUITABILITY REQUIREMENTS...


A WORKING PLATFORM WITH 1.5M CLEARANCE ALL ROUND THE CHIMNEY STACK MUST BE IN PLACE. THE PLATFORM MUST BE NO MORE THAN 200mm BELOW THE LEVEL OF THE TOP OF THE STACK OR FLUE / CHIMNEY TERMINATION. THERE MUST BE A TOP GUARD / HAND RAIL ALL ROUND AT 1.5M ABOVE THE WORKING PLATFORM WITH GAPS OF NO MORE THAN 470MM BETWEEN INTERMEDIATE GUARD RAILS. THE PLATFORM MUST HAVE A TOE BOARD ALL ROUND TO STOP TOOLS AND DEBRIS FALLING OFF. LADDERS MUST BE SECURED AND INTERNALLY FITTED TO EMERGE THROUGH ALTERNATING HATCHES AT EACH LANDING LEVEL. LANDINGS MUST BE NO MORE THAN 9M VERTICALLY APART. IF WEATHER CONDITIONS OR OVERHEAD CABLES MAKE IT UNSAFE TO WORK ON THE PLATFORM OUR ENGINEERS ARE INSTRUCTED NOT TO DO SO.

IF THE WORK IS BEING CARRIED OUT ABOVE AN AREA WHERE PUBLIC ACCESS IS NORMALLY PERMITTED THE SCAFFLODER / CLIENT MUST PROVIDE HOARDING OR A SAFETY BARRIER / CORDON TO ENSURE THE SAFETY OF ANYONE WORKING OR WALKING BELOW. PLEASE SUPPLY A JENNY WHEEL TO HOIST MATERIALS AND TOOLS SAFELY. PLEASE NOTE THAT FLEXIBLE FLUE LINER IS EASILY DAMAGED AND IS VERY EXPENSIVE - SO IT IS IMPORTANT THAT NO SCAFFOLD BARS ARE PROTRUDING BELOW THE JENNY.

MEANS OF ACCESS TO THE CHIMNEY TOP MUST BE SAFE AND MUST BE IN PLACE BEFORE THE WORK IS DUE TO START AND MUST REMAIN IN PLACE UNTIL FINAL COMMISSION AND HANDOVER OR SIGN OFF.

PLEASE NOTE THAT IF AN ALUMINIUM TOWER IS BEING PROVIDED OR A CHIMNEY SCAFFOLD PLATFORM OR SIMILAR MEANS OF ACCESS FROM A HIRE COMPANY IT MUST BE FIT FOR PURPOSE, REGULARLY CHECKED AND MAINTAINED AND SAFE TO USE. WE RECOMMEND THAT YOU HIRE FROM A REPUTABLE COMPANY REGISTERED UNDER THE 'SAFE-HIRE' SCHEME OR SIMILAR.

GUARD RAIL / HAND RAIL 1.5M ABOVE WORKING PLATFORM.

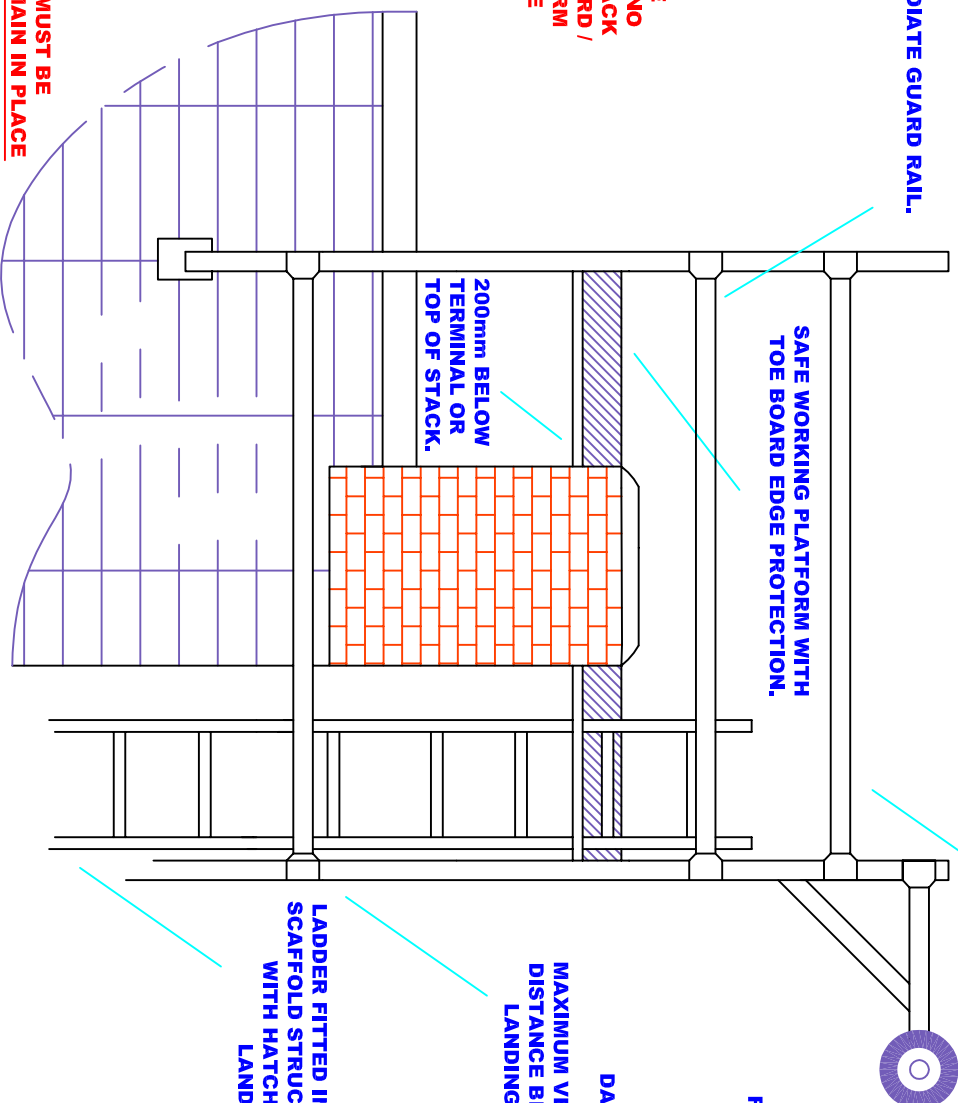

SAFE WORKING PLATFORM WITH TOE BOARD EDGE PROTECTION.

200mm BELOW TERMINAL OR TOP OF STACK.

JENNY WHEEL TO HOIST FLEXIBLE FLUE LINER & / OR MATERIALS & TOOLS.
*NOTE: PLEASE ENSURE NO SCAFFOLD BARS PROTRUDE OUTWARDS BELOW HOIST AS THIS WILL SNAG AND DAMAGE THE FLUE LINER ETC.

MAXIMUM VERTICAL DISTANCE BETWEEN LANDINGS IS 9M.

LADDER FITTED INSIDE SCAFFOLD STRUCTURE WITH HATCHES IN LANDINGS.

ROOF LINE AND GABLE.

ChimFlue Ltd

Unit 3, Viscount Court
South Way, Walsworth Industrial Estate
Andover, Hampshire, SP10 5NW
Tel: 01264 332878
Fax: 01264 386647
Email: Sales@chimflue.co.uk
Client

AS QUOTATION

Drawing Title
ACCESS BY OTHERS. TYPICAL EXAMPLE.

Project
SCAFFOLD ACCESS ADVISE SHEET

Engineer	Date	Scale
Drawn PK	22.11.2007 Drawing No.	NTS
Checked		